

High-value AV Receiver offers 1080p-compatible HDMI (2 in/1 out), YPAO sound optimisation, Compressed Music Enhancer and CINEMA DSP.



High Sound Quality

- 5-channel powerful surround sound (525W=105W x 5 for Europe, 500W=100W x 5 RMS)
- 192 kHz/24-bit DACs for all channels
- High dynamic power, low-impedance drive capability

High Picture Quality

- 1080p-compatible HDMI switching (2 in/1 out) including 1080p/24Hz repeat
- Supports Deep Colour (30/36 bit) pass through and x.v.Colour pass through

Advanced Features

- Four SCENE buttons offering easy operation (with 12 preset SCENE template)
- YPAO sound optimisation for automatic speaker setup
- Front panel mini jack input for connecting portable audio player
- 9 selectable subwoofer crossover frequencies

- Subwoofer phase select
- Subwoofer out
- Initial Volume Setting and Maximum Volume Setting
- 40-station preset tuning and RDS (Radio Data System)
- Speaker A or B selection

Surround Realism

- CINEMA DSP with 8 DSP programmes
- Compressed Music Enhancer
- Night Listening Enhancer (Cinema/Music) and SILENT CINEMA
- Audio Delay for adjusting Lip-Sync (0-160ms)

Brilliant Audio: Titanium



The RX-V365 offered with black, titanium and silver finish available in some areas.

AV Receiver RX-V365

NEW PRODUCT BULLETIN

Main Specifications

Audio Section	
Maximum Output Power per Channel (For Europe, 4 ohms, 1 kHz, 0.7% THD)	
Front L/R Channels	105 W/ch
Centre Channel	105 W
Surround L/R Channels	105 W/ch
Minimum RMS Output Power (8 ohms, 1 kHz, 0.9% THD)	
Front Channels	100 W +100 W
Center Channel	100 W
Surround Channels	100 W +100 W
Dynamic Power/Ch (Front Ch, 6/4/2 ohms)	105/130/150 W
Input Sensitivity/Impedance (1 kHz, 100 W/6 ohms, CD)	200mV/47 k-ohms
Output Level/Impedance	Rec Out 200 mV/1.2 k-ohms Subwoofer 4 V/1.2 k-ohms
Frequency Response	10 Hz-100 kHz +0, -3 dB

Total Harmonic Distortion (1 kHz, 50 W/8 ohms)	0.06%
Signal-to-Noise Ratio (CD, 250 mV)	100 dB

Video Section


Video Monitor Out Frequency Response Component Video Signal	5 Hz-60 MHz -3 dB
---	-------------------

Tuner Section

FM 50dB Quietening Sensitivity	Mono	2.8 µV (20.2 dBf)
FM Signal-to-Noise Ratio	Mono / Stereo	73 dB / 70 dB

General

Standby Power Consumption	0.8 W
Dimensions (W x H x D)	435 x 151 x 318 mm
Weight	8 kg

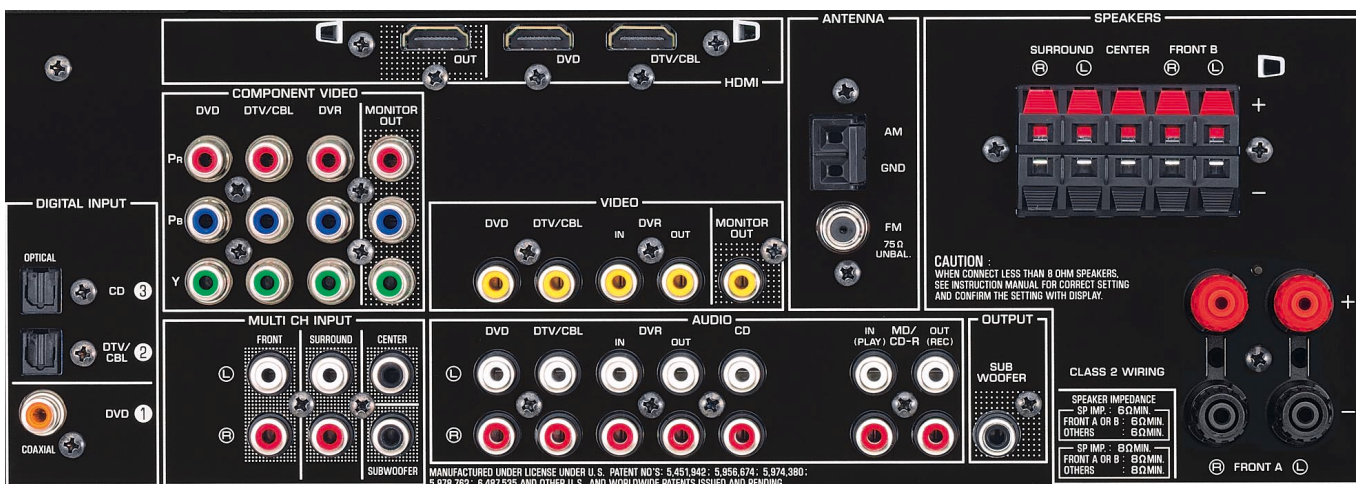

Extensive Connections

Inputs	
HDMI	2
Radio Antenna (FM/AM)	1 / 1
Optical Digital (Fixed and Assignable)	2
Coaxial Digital (Fixed and Assignable)	1
Analogue Audio*	6
Component Video (Fixed and Assignable)	3
Multi-Channel External Decoder	6ch

* Including front panel terminals.

Outputs	
HDMI	1
Analogue Audio	2
Component Video Monitor	1
Composite Monitor	1
Speaker (without subwoofer)*	5ch / 7 ter.
Subwoofer	1

* Banana-plug compatible speaker terminals are not available in some areas.

• Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. • "DTS" and "DTS Digital Surround" are registered trademarks of DTS, Inc. • HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. • "x.v.Colour" is a trademark of Sony Corporation. • CINEMA DSP is a trademark of Yamaha Corporation. • SILENT CINEMA is a trademark of Yamaha Corporation. • Product designs and specifications are subject to change without notice.